

PRODUCT REFERENCE SHEET


Standard Cushion Inserts for Coaxial Cable Applications

1214 PR L (Pg. 1 of 3)

PRODUCT DESCRIPTION

Standard Cushion Inserts provide a weather tight seal around coaxial cable or elliptical waveguide when penetrating building walls or equipment bulkheads. SC-series cushions can be ordered individually, in boot assemblies, or with cushion hanger assembly kits to meet any application requirements. Standard cushion inserts are constructed from UV-resistant EPDM rubber which is durable in extreme temperatures and harsh environmental conditions.

TYPICAL APPLICATIONS

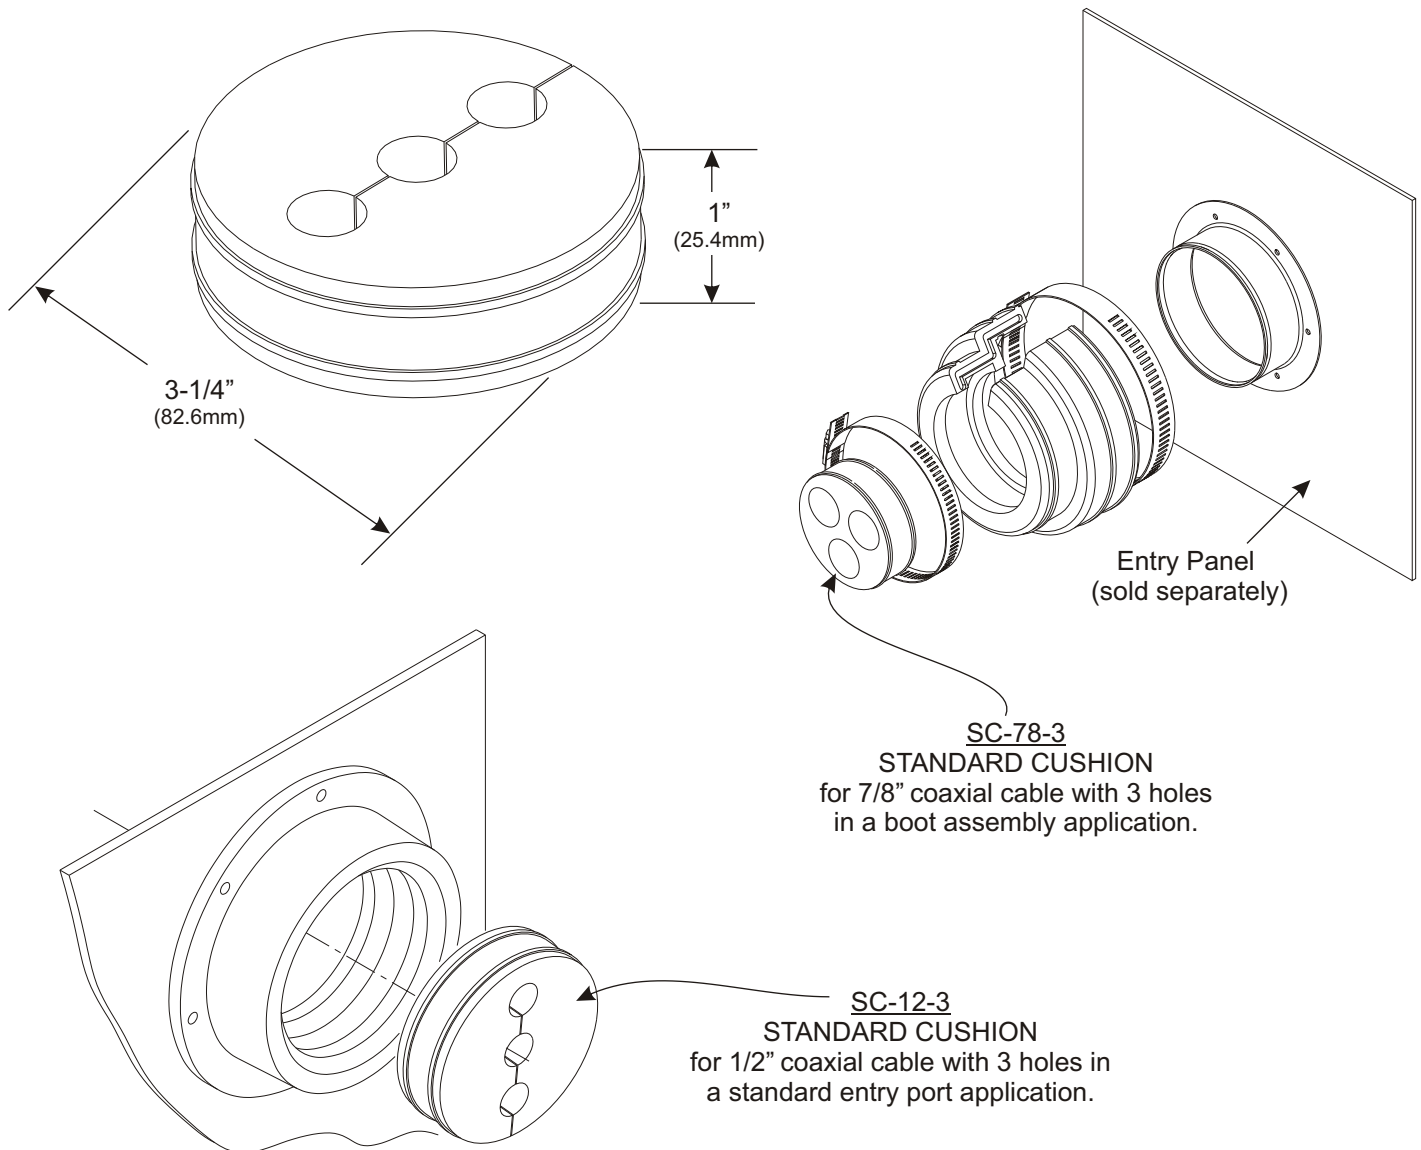

SPECIFICATIONS

STANDARD COAX CUSHIONS				
STANDARD PORT CUSHION FOR COAXIAL CABLE				
<u>Part Number</u>	<u>Size</u>	<u># of Holes</u>	<u>Weight lbs. (kg)</u>	<u>Kit Qty.</u>
SC-B		0	0.4 (0.2)	Each
SC-12-1	1/2"	1	0.4 (0.2)	Each
SC-12-2	1/2"	2	0.4 (0.2)	Each
SC-12-3	1/2"	3	0.4 (0.2)	Each
SC-12-4	1/2"	4	0.4 (0.2)	Each
SC-12-5	1/2"	5	0.4 (0.2)	Each
SC-38-1	3/8"	1	0.4 (0.2)	Each
SC-38-2	3/8"	2	0.4 (0.2)	Each
SC-38-3	3/8"	3	0.4 (0.2)	Each
SC-38-9	3/8"	9	0.4 (0.2)	Each
SC-58-1	5/8"	1	0.4 (0.2)	Each
SC-58-2	5/8"	2	0.4 (0.2)	Each
SC-58-3	5/8"	3	0.4 (0.2)	Each
SC-58-4	5/8"	4	0.4 (0.2)	Each
SC-78-1	7/8"	1	0.4 (0.2)	Each
SC-78-2	7/8"	2	0.4 (0.2)	Each
SC-78-3	7/8"	3	0.4 (0.2)	Each
SC-78-4	7/8"	4	0.4 (0.2)	Each
SC-114-1	1-1/4"	1	0.3 (0.1)	Each
SC-158-1	1-5/8"	1	0.3 (0.1)	Each
SC-214-1	2-1/4"	1	0.2 (0.09)	Each
STANDARD PORT CUSHION FOR CELL REACH® COAX				
<u>Part Number</u>	<u>Size</u>	<u># of Holes</u>	<u>Weight lbs. (kg)</u>	<u>Kit Qty.</u>
SC-12CR-1	1/2"	1	0.4 (0.2)	Each
SC-12CR-2	1/2"	2	0.4 (0.2)	Each
SC-12CR-3	1/2"	3	0.4 (0.2)	Each
SC-212CR-4	1/2"	4	0.4 (0.2)	Each
SC-38CR-1	3/8"	1	0.4 (0.2)	Each
SC-38CR-3	3/8"	3	0.4 (0.2)	Each
SC-38CR-9	3/8"	9	0.4 (0.2)	Each
SC-78CR-1	7/8"	1	0.4 (0.2)	Each
SC-78CR-2	7/8"	2	0.3 (0.1)	Each
SC-78CR-3	7/8"	3	0.3 (0.1)	Each
SC-78CR-4	7/8"	4	0.3 (0.1)	Each
SC-158CR-1	1-5/8"	1	0.3 (0.1)	Each
STANDARD PORT CUSHION FOR RG213, RG-214,&RG11				
<u>Part Number</u>	<u>Size</u>	<u># of Holes</u>	<u>Weight lbs. (kg)</u>	<u>Kit Qty.</u>
SC-RG213-6	RG213, RG214, & RG11	6	0.3 (0.1)	Each



The Americas
Tel: +1.203.759.3744
Fax: +1.203.759.3748

Europe
Tel: +31.(0)77.3961840
Fax: +31.(0)77.3961849

Asia
Tel: +65.6899.9282
Fax: +65.6566.7913

...Consider it Done!

ISO 9001:2000 Registered

SPECIFICATIONS

STANDARD COAX CUSHIONS				
STANDARD PORT CUSHION FOR RG8 COAXIAL CABLE				
<u>Part Number</u>	<u>Size</u>	<u># of Holes</u>	<u>Weight lbs. (kg)</u>	<u>Kit Qty.</u>
SC-RG8-6	RG8	6	0.3 (0.1)	Each
STANDARD PORT CUSHION FOR FLEX COAX				
<u>Part Number</u>	<u>Size</u>	<u># of Holes</u>	<u>Weight</u>	<u>Kit Qty.</u>
SC-12F-1	1/2"	1	0.4 (0.2)	Each
SC-12F-2	1/2"	2	0.4 (0.2)	Each
SC-12F-3	1/2"	3	0.4 (0.2)	Each
SC-12F-4	1/2"	4	0.4 (0.2)	Each
STANDARD PORT CUSHION FOR LMR COAX				
<u>Part Number</u>	<u>Size</u>	<u># of Holes</u>	<u>Weight lbs. (kg)</u>	<u>Kit Qty.</u>
SC-400T-6	LMR-400	6	0.3 (0.1)	Each
SC-600T-1	LMR-600	1	0.4 (0.2)	Each
SC-600T-2	LMR-600	2	0.4 (0.2)	Each
SC-600T-3	LMR-600	3	0.4 (0.2)	Each
SC-600T-4	LMR-600	4	0.4 (0.2)	Each
SC-900T-1	LMR-900	1	0.4 (0.2)	Each
SC-900T-2	LMR-900	2	0.4 (0.2)	Each
SC-900T-3	LMR-900	3	0.4 (0.2)	Each
SC-900T-4	LMR-900	4	0.4 (0.2)	Each
SC-1200T-1	LMR-1200	1	0.3 (0.1)	Each
SC-1200T-2	LMR-1200	2	0.3 (0.1)	Each
SC-1200T-3	LMR-1200	3	0.3 (0.1)	Each
SC-1700T-1	LMR-1700	1	0.3 (0.1)	Each
STANDARD PORT CUSHION FOR ELLIPTICAL WAVEGUIDE				
<u>Part Number</u>	<u>Size</u>	<u># of Holes</u>	<u>Weight lbs. (kg)</u>	<u>Kit Qty.</u>
SC-37-1	EW37	1	0.3 (0.1)	Each
SC-46-1	E46	1	0.3 (0.1)	Each
SC-52-1	EW52 & E60	1	0.3 (0.1)	Each
SC-63-1	EW63 & E65	1	0.3 (0.1)	Each
SC-70-1	E70	1	0.3 (0.1)	Each
SC-77-1	EW77 & E78	1	0.4 (0.2)	Each
SC-85-1	EW85 & E108	1	0.4 (0.2)	Each
SC-90-1	EW90	1	0.4 (0.2)	Each
SC-127-1	EW127 & E130	1	0.4 (0.2)	Each
SC-150-1	E150 & EW132	1	0.4 (0.2)	Each
SC-180-1	EW180	1	0.4 (0.2)	Each
SC-220-1	EW220	1	0.4 (0.2)	Each



The Americas
Tel: +1.203.759.3744
Fax: +1.203.759.3748

Europe
Tel: +31.(0)77.3961840
Fax: +31.(0)77.3961849

Asia
Tel: +65.6899.9282
Fax: +65.6566.7913

...Consider it Done!

ISO 9001:2000 Registered