



**Open Weave Hoisting Grips
for Coaxial Cable Applications**

1164 PR L (Pg. 1 of 2)

PRODUCT DESCRIPTION

Open Weave Hoisting Grips provide an effective means for hoisting coax into position. The Open Weave design allows the hoisting grip to be attached when the run has been connectorized and facilitates easy positioning at 200' increments on long coax runs. Open Weave Hoisting Grips are manufactured from Stainless Steel.

TYPICAL APPLICATIONS

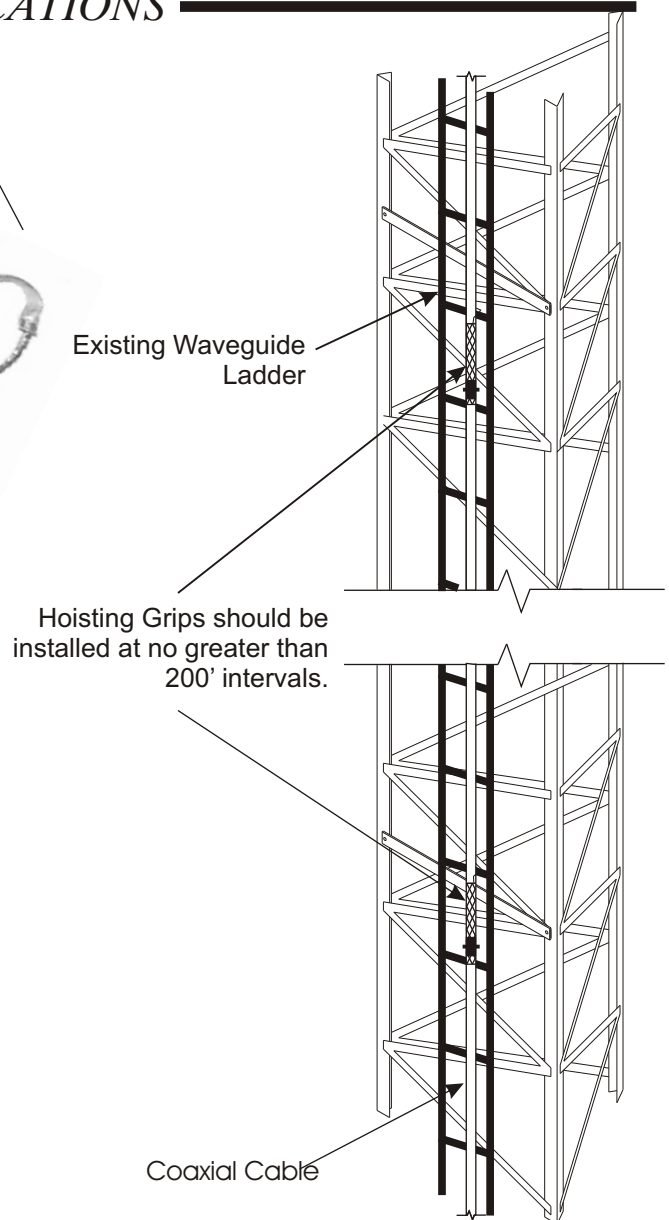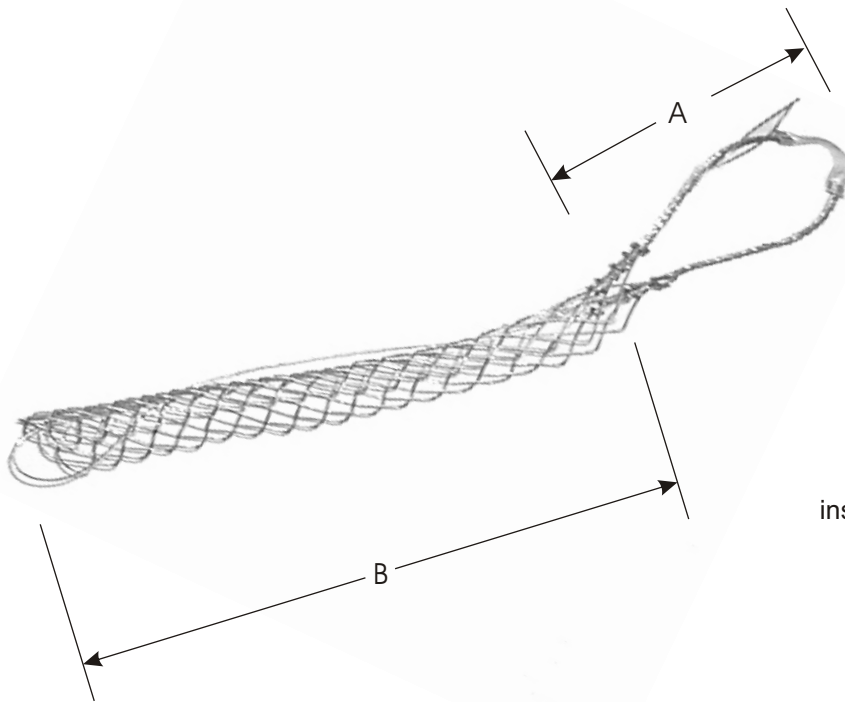

NOTE:

Once the cable is hoisted into position, hoisting grips should be fastened to the structure to provide support for the cable. It is not recommended that hoisting grips be reused due to possible hoisting grip failure.

SPECIFICATIONS

LACE-UP HOISTING GRIPS (Open Weave)					
Part #	Description	"A"	"B"	Wt.	Kit Qty
HGO14	Lace-up Hoisting Grip for 1/4" corrugated, 1/4" Fiber, Cell Reach™, AirCell™ and LMR-200 coaxial cable	5"	7"	0.04 lbs.	Each
HGO38	Lace-up Hoisting Grip for 3/8" corrugated, Cell Reach™, AirCell™ and LMR-400 coaxial cable	5"	7"	0.05 lbs.	Each
HGO12	Lace-up Hoisting Grip for 1/2" corrugated, Cell Reach™, AirCell™ and LMR-600 coaxial cable	7"	8"	0.12 lbs.	Each
HGO58	Lace-up Hoisting Grip for 5/8" AirCell™ and LMR-900 coaxial cable	7"	22"	0.32 lbs.	Each
HGO78	Lace-up Hoisting Grip for 7/8" corrugated, Cell Reach™, AirCell™ and LMR-1200 coaxial cable	12-1/2"	21-1/2"	0.48lbs.	Each
HGO114	Lace-up Hoisting Grip for 1-1/4" and LMR-1700 coaxial cable	13"	27"	0.49 lbs.	Each
HGO158	Lace-up Hoisting Grip for 1-5/8" and Corrugated coaxial cable	15"	30"	1.3 lbs.	Each
HGO214	Lace-up Hoisting Grip for 2-1/4" Corrugated coaxial cable	15"	30"	1.4 lbs.	Each
HG0300	Lace-up Hoisting Grip for 3" Corrugated Air Dielectric coaxial cable	18"	30"	1.5lbs	Each
HGO318	Lace-up Hoisting Grip for 3-1/8" Corrugated Air Dielectric coaxial cable	18"	30"	1.5lbs	Each
HG0400	Lace-up Hoisting Grip for 4" Corrugated Air Dielectric coaxial cable	20"	54"	3.5lbs	Each



The Americas
 Tel: +1.203.759.3744
 Fax: +1.203.759.3748

Europe
 Tel: +31.(0)77.3961840
 Fax: +31.(0)77.3961849

Asia
 Tel: +65.6899.9282
 Fax: +65.6566.7913

...Consider it Done!

ISO 9001:2008 Registered